


TEXOUT[®]
COVER

TEXOUT[®]
PRECONTRAIN 302
SOLIDS



Pratic[®]
Selection

texout.com

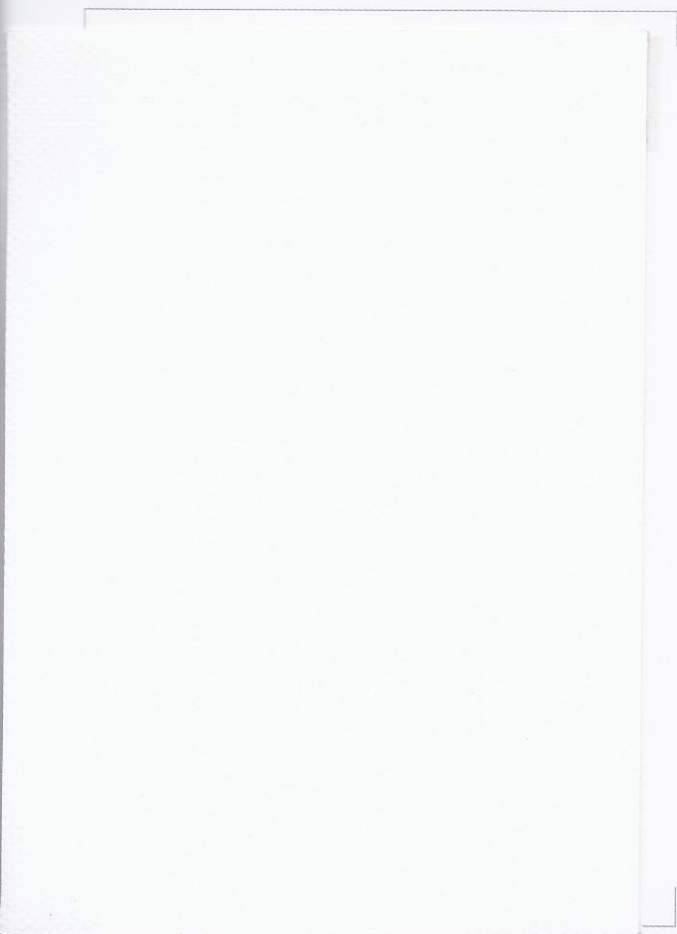

1498 BIANCO PERLA



741 AVORIO



1118 GHIACCIO



1001 BEIGE

8100 BIANCO




861 BEIGE



1093 SABBIA



006 GIALLO

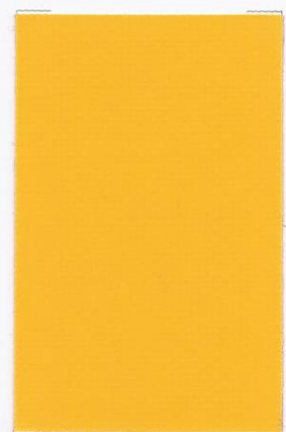

199 GIALLO



1496 OCRA



1497 MATTONE



1116 SALMONE




256 ROSA

LUCIDO/GLOSSY




2150 LAMPONE

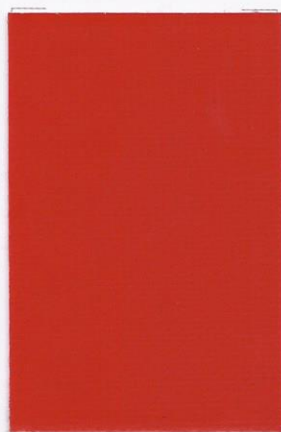


255 ROSSO




8284 BORDEAUX

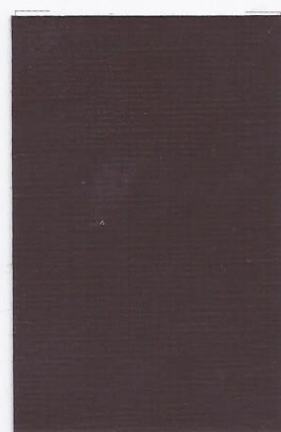

1115 MARRONE

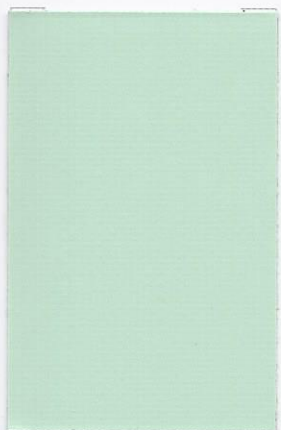

1117 VERDE

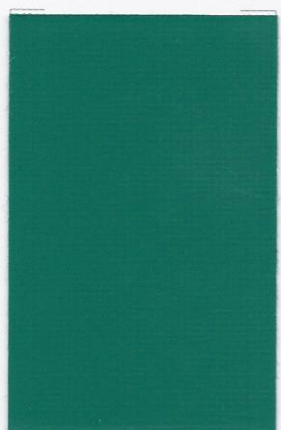

060 VERDE



056 VERDE



003 CARAIBI



001 BLU



390 GRIGIO



358 GRIGIO



400 ARGENTO



450 NERO

TEXOUT® PRECONTRAI NT 302 SOLIDS

COD 6338 (SOLIDS)

	IT	EN	DE	FR
Filato / Yarn / Garn / Fil	ordito: poliestere 550 Dtex trama: poliestere 550 Dtex	warp: polyester 550 Dtex weft: polyester 550 Dtex	Kette: Polyester 550 Dtex Schuss: Polyester 550 Dtex	chaîne: polyester 550 Dtex trame: polyester 550 Dtex
Spalmatura / Coating / Beschichtung / Enduction	PVC	PVC	PVC	PVC
Costruzione / Construction / Einstellung / Contexture	ordito: 10 fili/cm trama: 10 fili/cm	warp: 10 yarns/cm weft: 10 yarns/cm	Kette: 10 Fäden/cm Schuss: 10 Fäden/cm	chaîne: 10 fils/cm trame: 10 fils/cm
Spessore / Thickness / Stärke / Epaisseur	0,36 mm	0,36 mm	0,36 mm	0,36 mm
Peso tessuto / Weight / Gewicht / Poids	ca 480 g/m ²	ca 480 g/m ²	ca 480 g/m ²	ca 480 g/m ²
Ignifugazione Flammability Entflammbarkeit Ignifugation	CL 2 secondo le norme italiane RF 1/75 e 3/77	M2 NFP 92.503	B1 nach DIN 4102	M2 NFP 92.503
Finissaggio / Finishing / Schlusslack / Finition	laccato lucido sui 2 lati, impermeabile e antimacchia	shiny lacquered on both sides, water-proof, dirt-resistant	beidseitig Hochglanz, wasserdicht, schmutzabweisend	vernice brillante biface, impermeable, anti-salissure
Resistenza alla trazione / Breaking strength / Reißkraft / Résistance à la traction (EN-ISO 1421)	ordito: ca 140 DaN/5 cm trama: ca 150 DaN/5 cm	warp: ca 140 DaN/5 cm weft: ca 150 DaN/5 cm	Kette: ca 140 DaN/5 cm Schuss: ca 150 DaN/5 cm	chaîne: ca 140 DaN/5 cm trame: ca 150 DaN/5 cm
Resistenza allo strappo Tear strength Weiterreißfestigkeit Résistance à la déchirure (DIN 53363)	ordito: ca 10 DaN trama: ca 12 DaN	warp: ca 10 DaN weft: ca 12 DaN	Kette: ca 10 DaN Schuss: ca 12 DaN	chaîne: ca 10 DaN trame: ca 12 DaN
Resistenza alla luce Resistance to light Lichtbeständigkeit Résistance à la lumière (ISO 105 B02)	livello 7/8	Level 7/8	Niveau 7/8	niveau 7/8
Resistenza alle temperature Temperature resistance Temperaturbeständigkeit Résistance à la température	+70°C / -30°C	+70°C / -30°C	+70°C / -30°C	+70°C / -30°C
Aderenza / Adhesion / Haftung / Adhérence (IVK/PKT 14)	ca 7 DaN/5	ca 7 DaN/5	ca 7 DaN/5	ca 7 DaN/5
Disponibilità / Availability / Verfügbarkeit / Disponibilitè sur stock	standard in magazzino	on stock	auf Lager	en réserve
Altezza del tessuto / Roll width / Breite / Laize	180 cm	180 cm	180 cm	180 cm
Lunghezza rotolo / Roll length / Rollenlänge / Longueur de la pièce	ca 50 m	ca 50 m	ca 50 m	ca 50 m

2013/2016 COLLECTION

I dati tecnici possono subire variazioni a seconda dei lotti di produzione e sono soggetti a tolleranza di ±5%

The a. m. technical data can vary according to production lots and are subject to a +/- 5% tolerance.

Die technischen Daten sind mittlere Werte mit einer Toleranz von +/- 5%

Les données techniques peuvent varier selon le lot de fabrication et sont sujettes à une tolérance de ±5%